


New from UTEX Industries, Inc.

Chem

PATCH™

P I P E R E P A I R K I T

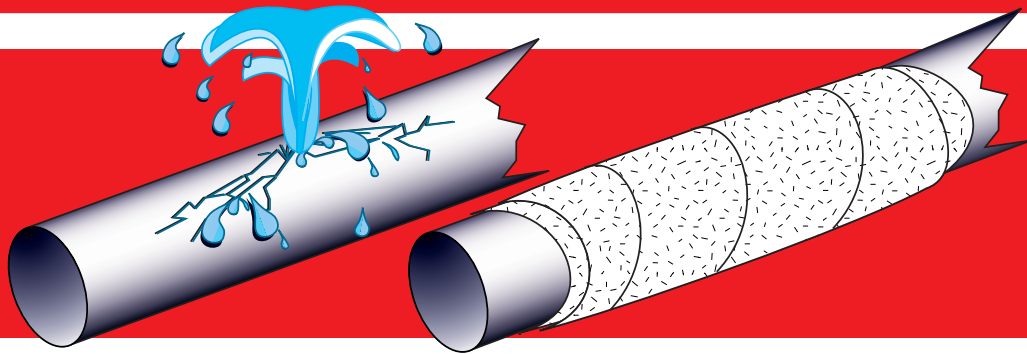

Quick-action repair for cracked or broken pipes under pressure.

This Pipe Repair Kit combines ChemPatch™, a fiberglass cloth impregnated with a water activated resin and a unique rubber tape.

This combination was designed to repair leaking cracked or broken pipes while under pressure. Maximum pressure 60 psi. Once properly applied the rubber tape will stop your leak immediately! ChemPatch has a normal cure time of 30 minutes, but may vary depending on temperature. This system will repair PVC, metal, rubber, fiberglass, plastics, etc., making it ideal for all types of repair and maintenance applications without the downtime.

ChemPatch Repair Kit (under pressure) is available in 2" x 5', 3" x 9', and 4" x 15' lengths.



PRODUCT SPECIFICATIONS

ADVANTAGES

No down time
 No mixing, no mess
 No tools or cleanup needed
 Time-saving installation
 Nontoxic
 Noncombustible

MECHANICAL PROPERTIES

Structure	Method	PSI
Flexural Str.	ASTM D 709-71	16,100
Tensile Str.	ASTM D 638	24,900
Compression Str.	ASTM D 695-77	26,600
Dielectric Str.	16060 Volts	
Heat Resistance	500°F (260°C)(Intermittent)	

PIPE DIAMETER

1/2" - 1" (2"X5')
 1 1/4" - 2" (3"X9')
 2 1/2" - 4" (4"X5')

PRODUCT CODES

PPS520
 PPS930
 PPS415

CHEMICAL RESISTANCE

Test Period 2 Months		Surface Changes	Type of SurfaceChange
Distilled water	73°F	none	none
Sulphuric acid, 10%	73°F	none	none
Sulphuric acid, 50%	73°F	none	none
Hydrochloric acid, 10%	73°F	none	none
Hydrochloric acid, 50%	73°F	30 days	blistering
Nitric acid, 10%	73°F	30 days	blistering
Acetic acid, 10%	73°F	30 days	blistering
Formic acid, 10%	73°F	30 days	destruction
Soda solution, saturated	118°F	none	none
Sodium hydroxide sol., 20%	73°C	none	none
Sodium hydroxide sol., 20%	122°F	none	none
Ammonia, 10%	73°F	30 days	blistering
Hydrogen peroxide, 10%	73°F	39 days	blistering
Fuel oil + 10% water	122°F	none	none
White Spirit	73°F	none	none
Toluene	73°F	none	none
Xylene	73°F	none	none
Methyl isobutyl ketone	73°F	60 days	softening
Methanol	73°F	2 days	softening
Gasoline	73°F	none	none



UTEX INDUSTRIES, INC.
 Taking Sealing Technology Beyond Tomorrow
 ISO 9001 Certified


World Headquarters: 10810 Old Katy Road • Houston, Texas 77043 • 713-467-1000 • 800-359-9229

Service Center: 1800 Sherwood Forest • Houston, Texas 77043 • 713-468-7791


Weimar: 605 Utex Drive • Weimar, Texas 78962 • 409-725-8503

Odessa: 1104 Market Avenue • Odessa, Texas 79761 • 915-333-4151 • 800-873-0946

<http://www.utexind.com>



Mechanical Seals



Compression Packing




Sheet Packing



Packing Tools



Molded Products



Industrial Chemicals